



Uniclass L725111	EPIC G611
CI/SB (74.26)	X

## Origo 9490 Bath Shower Mixer

### DATA

Thermostatic & Pressure Balanced Mixing Valve  
 Concealed supply  
 Maximum Temperature 90°  
 Minimum Pressure 0.5 Bar  
 Maximum Pressure 12 Bar  
 Pressure Differential 10 Bar  
 Normal Control Temperature 38°  
 Output Temp Differential +/- 1°c  
 Max Output 36 l/pm @ 6 Bar

### MATERIALS

Mixer Body BZR Brass With Chrome Finish  
 Handles ABS Plastic  
 Connections G1/2

### FEATURES

Thermostatic & Pressure Balanced Cartridges constant temp regardless of pressure variations  
 Patented fold away change over valve between bath & shower  
 Anti Scald cut off 0.02 seconds  
 Quick & Easy to fit & maintain  
 Can be Wall or Bath Mounted  
 NRV Fitted to Hot & Cold Inlets  
 We recommend the use of isolating ball valves with our units

### SPEC CODES




Mixer 9490-1530  
 Wall Fixing Bracket 9205-2050  
 Bath Legs 255S

### APPROVALS

WRAS ISO9001 ISO 14002

### APPLICATION

Multi user and multi floor applications. Residential,, hotels, accommodation blocks, halls of residence, barracks,

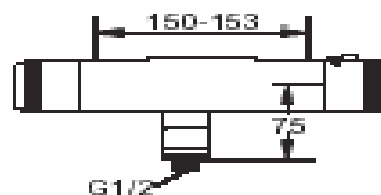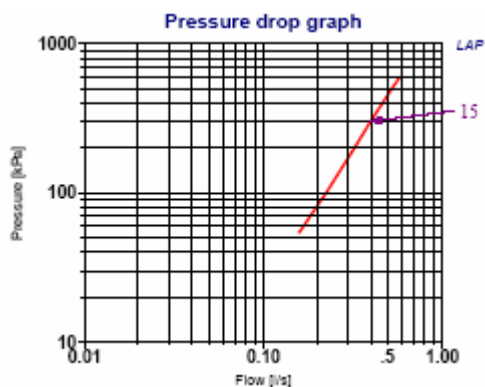

**10 YEAR  
CALCIUM  
GUARANTEE**  
FM Mattsson

**10 YEAR  
TEMPERATURE  
GUARANTEE**  
FM Mattsson

**10 YEAR  
PRESSURE  
GUARANTEE**  
FM Mattsson

0870 7657987

[www.alchallis.com](http://www.alchallis.com)

[info@alchallis.com](mailto:info@alchallis.com)



WRAS

APPROVED  
PRODUCT