



Uniclass L725111	EPIC G611
CI/SfB (74.26)	X

Electronic wall mounted tap, L. 200, with 6V Lithium battery electronic control unit and solenoid valve all integrated in the body of the tap. Regulated flow rate 8l./min. with scale proof aerator and anti-blocking in flow safety device. Top maintenance cover locked by 2 hidden screws. Delivered with stainless steel flexible inlet with filter and stop cock.

6V Lithium battery type 223 provided.

- We recommend compact thermostat for mixed water to be installed under the washbasin (see below).

Automatic opening/closing by presenting/removing hands from sensor detection range.

- Use: all public and commercial places, medical sector and food industry, disabled person sanitararies, offices, restaurants...


FREEDOM OF INSTALLATION on any isolated basin (no additional power supply required) due to integrated battery.

- INFRARED SENSOR located on top allows optimized detection of hands.
- FULL HYGIENE without manual contact, avoiding the propagation of bacteria/germs carried by the hands.
- WATER SAVING: about 80% in comparison to classical taps (due to shorter flow rate and flow duration)
- EASY MAINTENANCE: integrated cartridges, accessible by the top maintenance cover. Average life of batteries 6V. from 3 to 6 years with integrated battery power check device.
- ANTI-BLOCKING SAFETY: avoids risk of continuous flow (automatic closing after 20 sec. of continuous detection in case of malevolence, re-opening as soon as hands approach again).
- RELIABILITY: corrosion-proof solenoid valve. Foolproof detection of presence.
- SCALE PROOF AERATOR: 5 times slower scale deposit than a standard aerator.
- 3 YEARS WARRANTY

## 9944-3006 ELECTRONIC TAP



**443006**

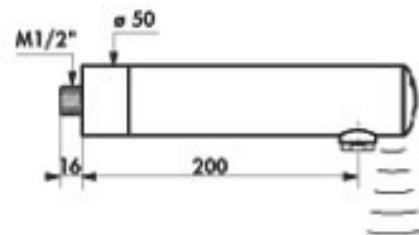

 **0870 7657987**

 **[www.alchallis.com](http://www.alchallis.com)**

 **[info@alchallis.com](mailto:info@alchallis.com)**